

1

2

2217205005101

2217205006101

CCM/510/1075/1  
CCM/610/1075/1

## ÖZELLİKLER / SPECIFICATIONS

1

2

Maksimum Çalışma Basıncı / Maximum Working Pressure	190 bar	190 bar
Toplam Yağ Hacmi / Total Oil Volume	1,5 lt	2 lt
Silindir Ağırlığı / Cylinder Weight	20 kg	24 kg
1. Kademe Maksimum İtme Kuvveti (180 bar) Maximum Thrust First Stage (180 bar)	5 ton	5 ton
Toplam Strok / Total Stroke	510 mm	610 mm
Yağ Giriş Çapı / Oil Inlet Diameter	R 1/2"	R 1/2"
Hidrolik Yağ Sıcaklığı / Oil Temperature Range	-20 & 80 °C	-20 & 80 °C
Kapalı Boy / Closed Length	770 mm	870 mm
Açık Boy / Open Length	1280 mm	1480 mm


## KADEME TABLOSU / REFERENCES

Kademe / Extension	1	2	3	4	5	6	7
Çap / Diameter	50						


## REFERANSLAR / REFERENCES

	1	2
A	: 75 mm	75 mm
B	: 50 mm	50 mm
C	: 30 mm	30 mm
D	:	
E	:	
F	:	
G	: 56,5 mm	56,5 mm
H	: 25 mm	25 mm
I	: 71,5 mm	71,5 mm
J	:	
K	:	
L	: 770 mm	870 mm
M	: 843 mm	943 mm
N	:	
O	:	
P	:	
R	: 36,5 mm	36,5 mm
S	:	
T	: R 1/2"	R 1/2"

## KARŞILAŞTIRMA TABLOSU / COMPARISON TABLE

Strok CT  
510mm / 610 mmBağlantı Mesafesi / Pivot Length  
DP (mm)Kalkma Açısı  $\alpha^\circ$  / Body Tilting Angle  $\alpha^\circ$ 

	40	45	50	55	60
Strok CT	746	666	603	552	510
Bağlantı Mesafesi / Pivot Length	892	797	722	661	610

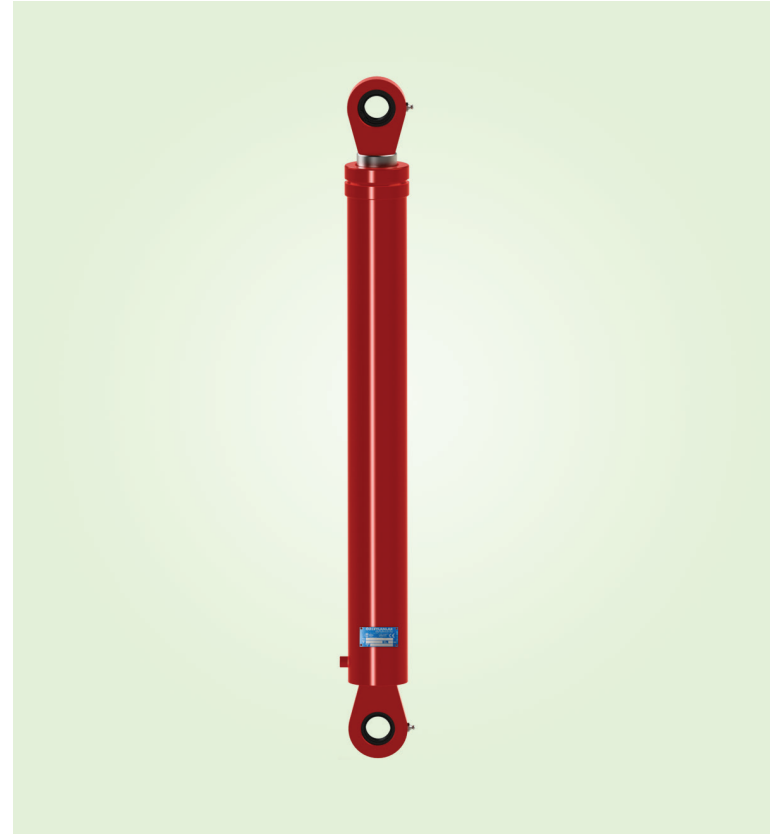

## TEKNİK ÇİZİM / TECHNICAL DRAWING

